

## Tadiran Medium Power Lithium Organic Cell Model TLM-1530MP

### 1. Scope

This data sheet describes the mechanical design and performance of Tadiran medium power lithium organic cell model TLM-1530MP.

### 2. Characteristics

#### 2.1. Physical

- 2.1.1. Length: 26.9 ± 0.5 mm.
- 2.1.2. Diameter: 14.8 ± 0.2 mm.
- 2.1.3. Weight: 11 gr. max.

#### 2.2. Electrical

- 2.2.1. Open Circuit Voltage (for batteries stored at RT for 1 year or less) 4.02 to 4.07 V
- 2.2.2. Closed Circuit Voltage (at 0.1 sec) at 0.5 A load 3.83 minimum
- 2.2.3. Discharge
  - Discharge capacity at 25 mA @ RT to 2.8 V 340 mAh
  - Discharge capacity at 250 mA @ RT to 2.8 V 300 mAh
  - Maximum discharge current
    - Continuous to 2.8 V: 2 A
    - 1 second pulse to 3 V: 5 A

- 2.3. Operating Temperature Range: -40 °C to 85 °C

- 2.4. Accumulated Capacity Loss\*:


Storage Temperature	22 °C	55 °C	72 °C	85 °C
Storage Time [Y]				
1	2 %	4 %	7 %	TBD
5	5 %	15 %	28 %	N/A
10	7.5 %	22 %	N/A	N/A
15	10 %	29 %	N/A	N/A
20	12.5 %	N/A	N/A	N/A

\* When tested at RT under 25 mA to 2.8 V


- 2.5. Cell impedance: Less than 200 mOhm @ 1 kHz at room temperature.

2.6 Performance Data:

Discharge capability at RT

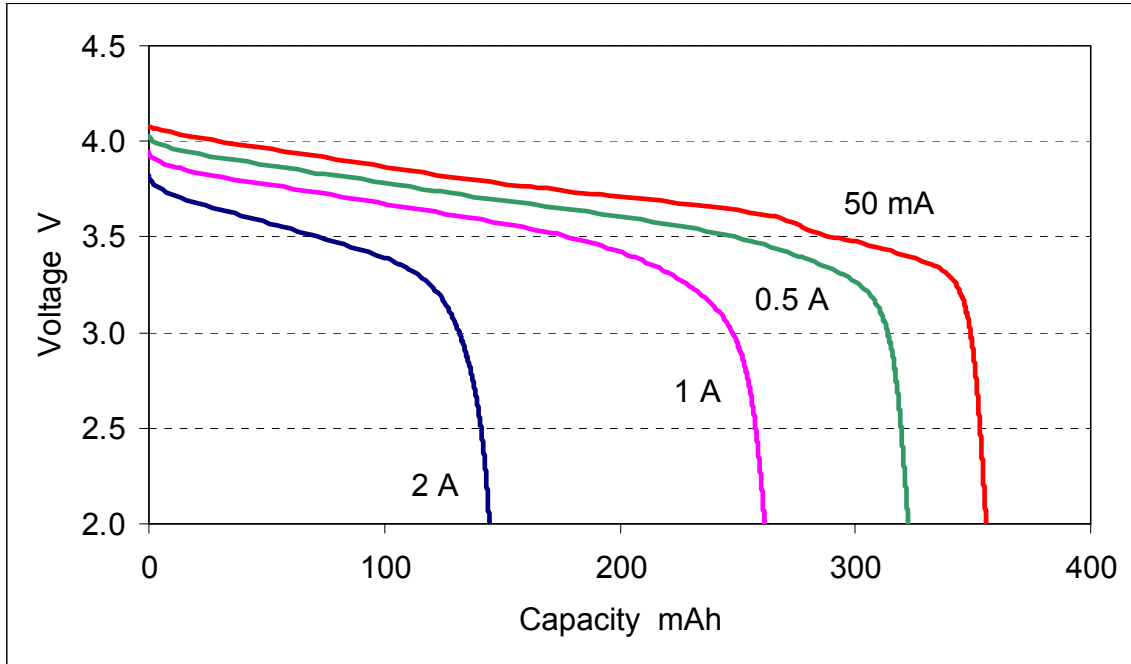


Pulse capability at RT

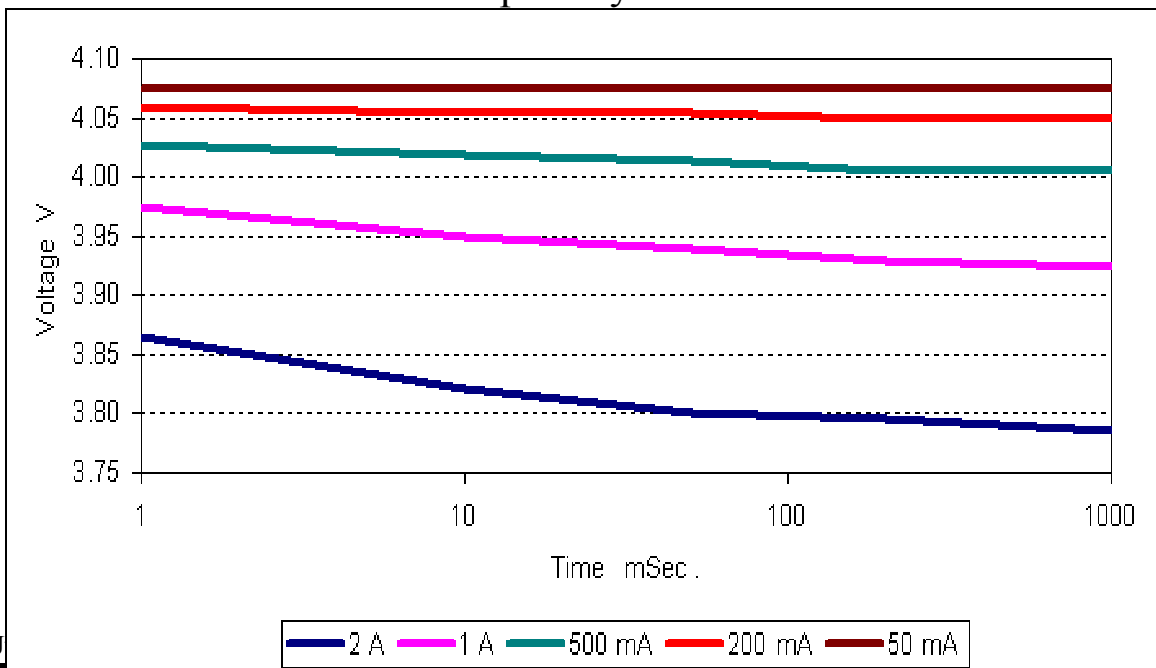


Rev. C, J

— 2 A — 1 A — 500 mA — 200 mA — 50 mA

### Discharge capability @ 0.5 A at several temperatures

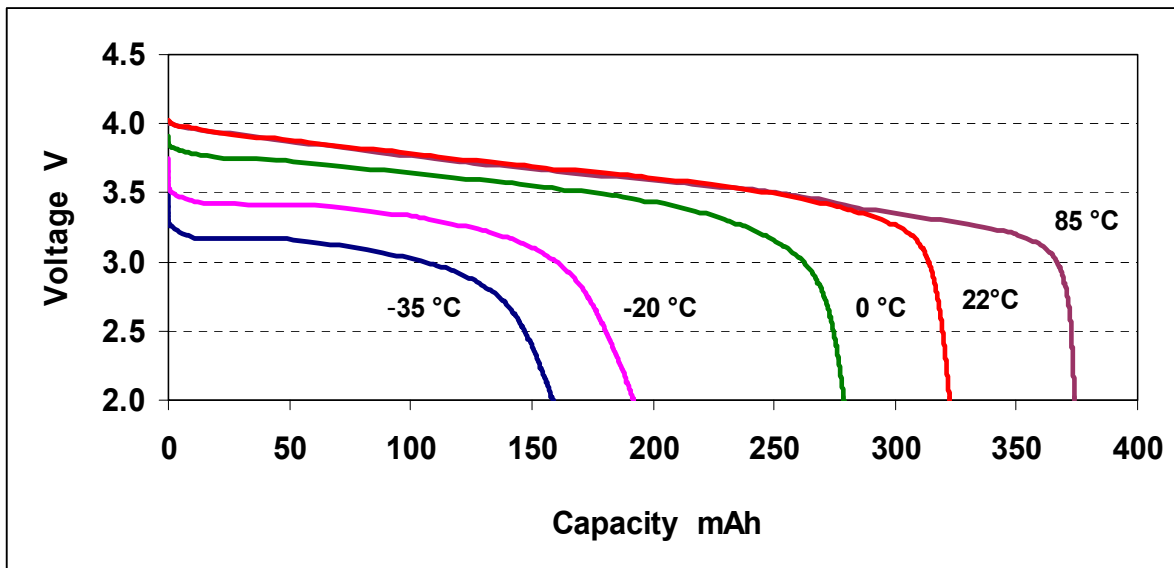


### Pulse capability @ 0.5 A at several temperatures

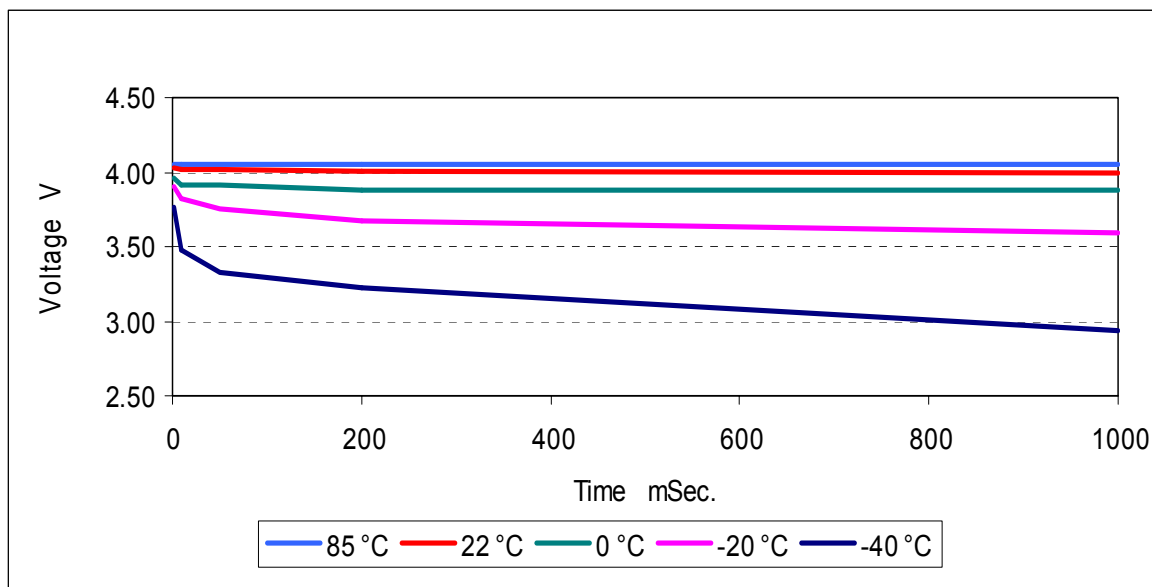

## 2.7 End of life indication:

OCV measurements can provide a good estimation for the remaining capacity of the cell as shown below:

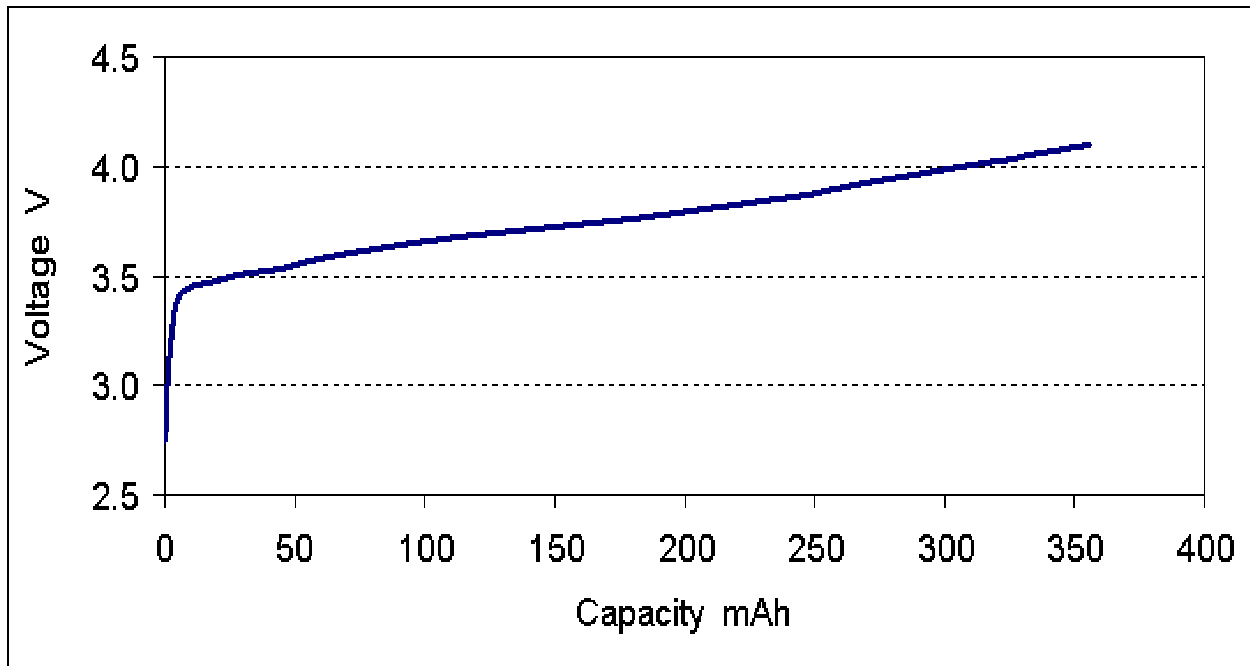

## 2.6. Safety tests:

The cell has successfully passed the following safety tests:

- Short circuit at RT and at 55°C
- Oven at 150°C
- Impact
- Nail penetration
- Over charge and over discharge